

# Quality, Reliability, **Affordability**

## **Air-Conditioning**

Automotive

Telecom

Cold Rooms

Cold Storage

Milk Cooling

Heat Pumps & Thermal Battery

Dry / Adiabatic Cooling

Microchannel Condenser Coil

# Heat Exchangers

- **24X7**  
Support


- **60%**  
Employees are  
Engineers &  
Domain Experts

- **2.0 Million**  
Coils can  
Manufactured  
Annually

- **200%**  
CAGR Growth  
since inception

- **ISO 9001:2015**  
Certification OMS  
Safety Standard  
81S certified

- **1, 50, 000 ft.**  
Campus Of  
Manufacturing  
Facility

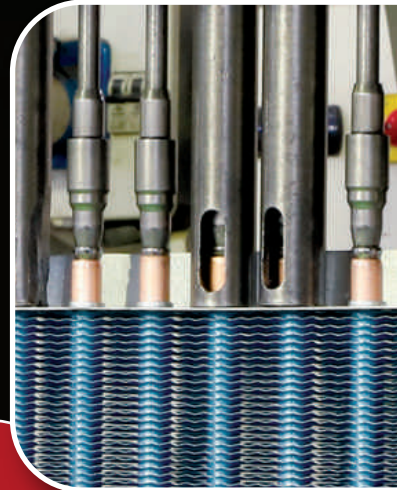

# From Engineering To Installation

Micro Coils manufactures high quality Fin & Evaporators and Condensers designed for all commercial air-conditioning and refrigeration applications across HVAC & R industry. With a state-of-the-art manufacturing plant, best-in-class raw materials and highly skilled work force, Micro Coils boasts of unmatched quality product that are made to order for every customer according to their business needs. We quickly adapt to the changing needs of our customers and work towards achieving sustainable growth

## INNOVATION

Innovation is one of the key cultural pillars at Micro Coils where we constantly look for ideas. We can build the right product for you from a rough sketch of your requirements. Heat exchangers offered by Micro Coils are custom designed by our experts to optimally suit your business requirements, making the systems more cost effective, energy neutral and easier to maintain. Micro Coils Also provides design consultancy. from scratch all the way to installation, for its valued customers helping them optimize their resources and providing optimum solutions for their business needs.






**EXPERTS  
IN  
DESIGN.**



**COMMITTED  
TO  
QUALITY.**

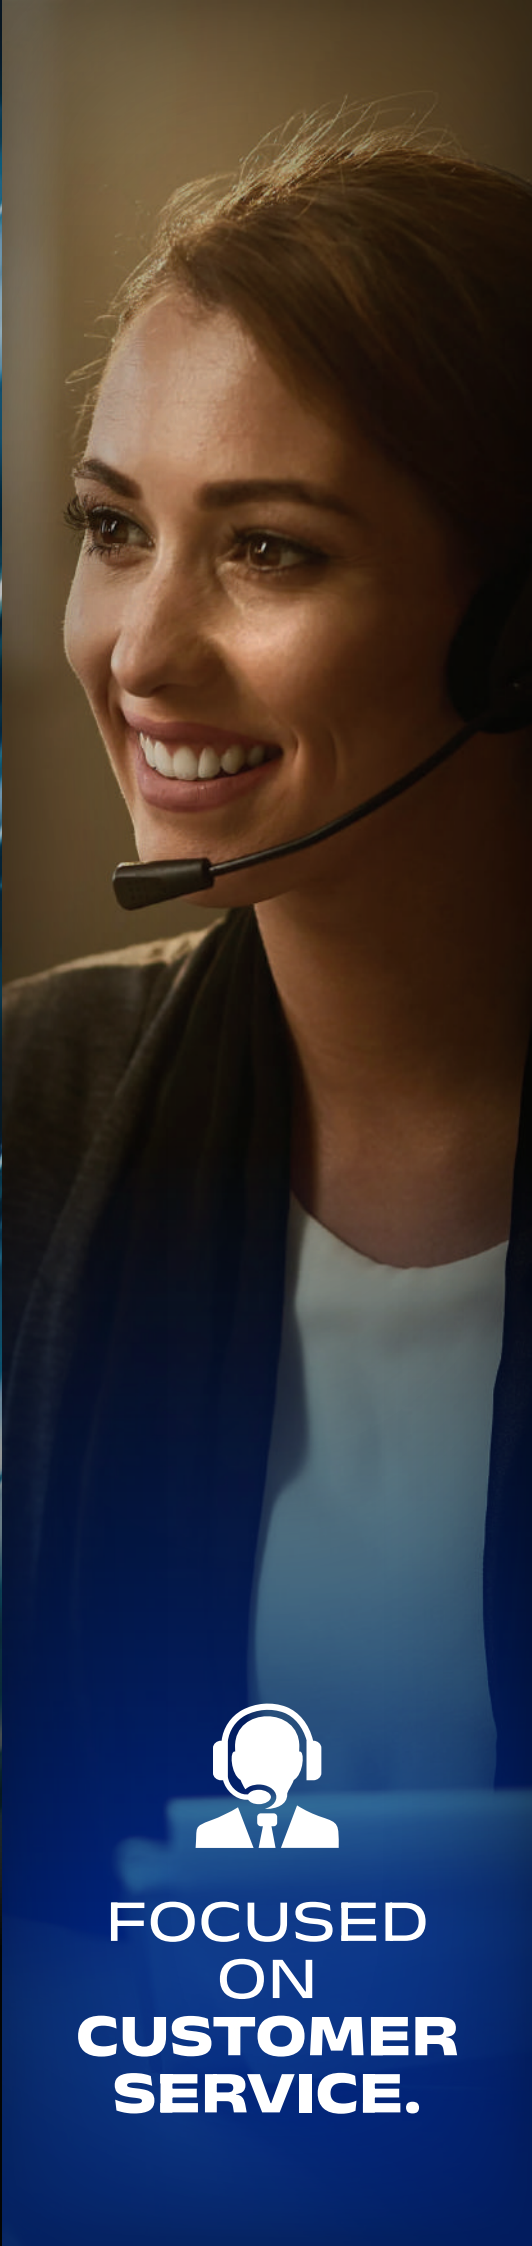

**FOCUSED  
ON  
CUSTOMER  
SERVICE.**




# Heat Exchangers

Micro Coils is committed to quality and customer service. We provide world-class Heat Exchangers to our customers worldwide.

Heat Exchangers from Micro Coils are unique because we offer:

- ✦ Affordability
- ✦ Extremely high quality
- ✦ Uncompromised timely delivery
- ✦ Design expertise for custom development
- ✦ Tailor-made solutions for your business requirements

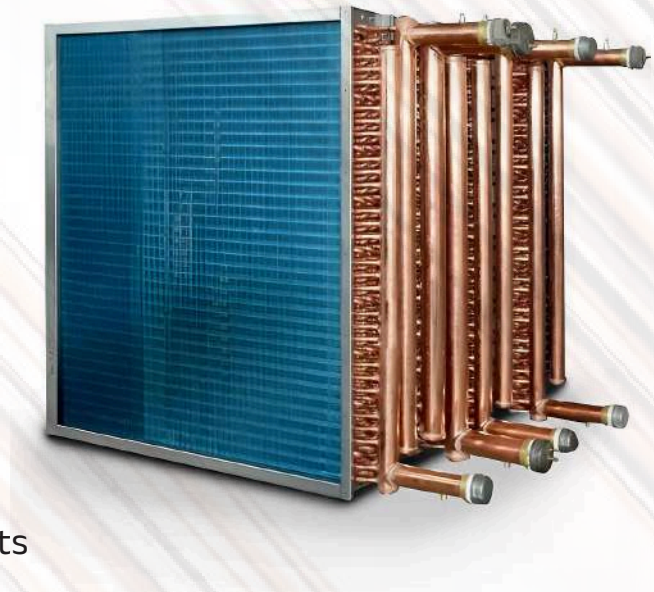

## Types of Heat Exchangers

### EVAPORATORS & CONDENSER COILS

- ✦ Plain or Internally Grooved Tubes.
- ✦ Length can range from 0.16mtr to 9mtr, can be bare or coated coils.
- ✦ Fin spacing as per customer requirements from 2.5 FPI to 21 FPI (fins per inch).
- ✦ Various Fin Patterns based on customer requirements.

**Sizes: 5mm, 7mm, 7.93mm, 9.52mm, 12.7mm & 15.88mm.**

### ENGINEERED COILS

- ✦ Condenser Coils with shroud.
- ✦ Evaporator with sheet metal for convenience.
- ✦ Coils with Copper fins and tin coating for enhanced environmental protection.

### SPECIAL COILS

- ✦ Aluminum
- ✦ Chilled Water Coils
- ✦ Gold Epoxy Coated
- ✦ Water & Brine (Glycol) Coils
- ✦ Blue Hydrophilic & Hydrophobic

### COOLING & HEAT PUMP COILS

# Specialized Coatings

- ❖ Tin Plating
- ❖ CED Coating
- ❖ Nano Coating
- ❖ Epoxy Coating
- ❖ Blygold Coating
- ❖ Heresite Coating
- ❖ Precoated Hydrophilic




## Quality You Can Trust



## Our Certifications



## Testing Facilities



Burst and Cyclic Testing



Internal Contamination Testing



Salt Spray Testing



Microscopic Examination

# Applications



# Green & Sustainable Cooling System

Micro Coils and Refrigeration Pvt. Ltd. is a leading manufacturer of Condensing Units, Evaporator Units, Telecom & Specially Designed Units for HVAC & R Industries. With expertise in design and engineering, an end-to-end range of solutions and a penchant for customer service. Micro Coils provides best-in-class technology for customers worldwide. Micro Coils has customers in Middle East & Europe, in addition to a fast growing market share across India & Asia.

Besides distributing a broad range of high efficiency evaporators, condensers and leading compressors. Micro Coils offers design & build cold room solutions customised to needs of end customers in the food & beverage and Pharmaceutical industry. The team is committed to deliver unmatched products and services through rapid innovation solving real business problem for customers across industries.



# Condensing Units

The integral horse power condensing units and indoor cooling units provide perfect cooling, creating value for its users. These condensing units and indoor units cater to all cold chain application including milk-cooling, fruits & vegetable, meat/ poultry cold storage, fishery and food services. Our condensing units have been successfully adopted in the Indian market and enjoy proven success with its robust and reliable design. These CDUs and IDUs have been used by several well know end users in the dairy sector and process chilling space.

MODEL	MCUJ511PE	MCUC022PE	MCUC030PE	MCUC036PE	MCUC042PE	MCUC062PE	MCUC072PE	MCUR108PE	MCUR125PE	MCUR144PE
Capacity (Btu/ Hr) at + 4C/ 35C	6K	10K	15K	18K	20K	34K	40K	60K	74K	80K
Refrigerant	R-22/R407c /R404a	R-22/R407c /R404a	R-22/R407c /R404a	R-22/R407c/ R404a	R-22/R407c/ R404a	R-22/R407c/ R404a	R-22/R407c/ R404a	R-22/R404a	R-22/R404a	R-22/R404a
Compressor Type	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Scroll	Recip or Scroll	Scroll
Dimensions (mm)	830x295x 557	830x295x 557	830x295x 557	1060x435x 695	1060x435x 695	1060x435x 695	1100x410x 1070	1290x600x 945	1590x650x 945	1590x650x 945
Power Supply	230V / 1 PH	230V- 1 Ph or 400 V 3ph	230V- 1 Ph or 400 V 3ph	230V- 1 Ph or 400 V 3ph	400V 1 3PH	400V 1 3PH	400V 1 3PH	400V 1 3PH	400V 1 3PH	400V 1 3PH
Weight (KG)	70	72	78	90	92	98	98	140	145	215

## Application Milk

TANK SIZE	300 L	500 L	1000 L	2000 L	3000 L	5000 L	10000 L
Body	Open Type	Fully Loaded	Fully Loaded	Full Loaded	Fully Loaded	Fully Loaded	Fully Loaded
Compressor	KCJ -513	ZB15	ZB21	Zb21	Zb38 x 2	Zb48 x 2	Zb48 x 2
Compressor Type	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll	Recip or Scroll
Refrigerant	R-22	R404A	R404A	R404A	R404A	R404A	R404A
Body Dimension (mm)	830 x 295 x 557	1060 x 435 x 695	1060 x 435 x 695	1060 x 435 x 695	1120 x 410 x 1065	1120 x 410 x 1065	1120 x 410 x 1065
Power Supply	230V / 1 PH	230V- 1 Ph or 400 V 3ph	230V- 1 Ph or 400 V 3ph	230V- 1 Ph or 400 V 3ph	400 V 3ph	400 V 3ph	400 V 3ph
Total Unit Wt. (KG)	80	95	110	110	128	135	135



# Applications




# Pillow Plates

Pillow Plates are heat exchanger plates that can be used in many ways for the industrial cooling of heating of your products. Micro Cool has good amount of experience in manufacturing Pillow Plates.

These laser welded plates have endless applications in different industries, Micro Cool Pillow Plates are used for vessels, For eg. cooling milk, soft drinks, wine or beer. But also other sectors use our plates like the chemical industry and the pharmaceutical industry.

- ❖ Evaporative Condenser
- ❖ Milk Tanks
- ❖ Process Tanks
- ❖ Immersion Chiller
- ❖ Ice Machine
- ❖ Heat Recovery Bank
- ❖ Conveyors
- ❖ Beer/ Wine Tanks
- ❖ Falling Film Chiller
- ❖ Special Purpose Cooling for Dirty Fluid

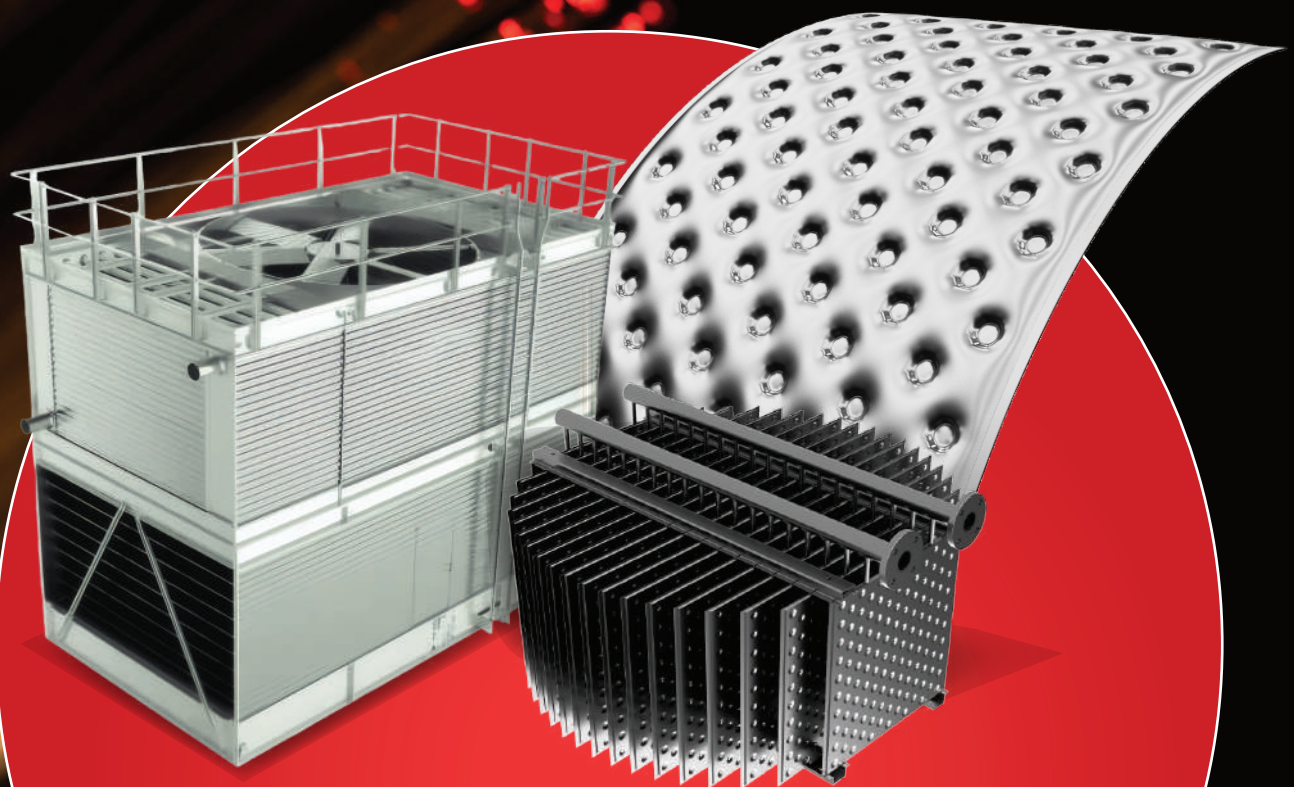

# Evaporator Units

The high efficient coils are made from high quality inner-grooved copper tubes and special profile aluminium fins. Heat exchangers are supplied clean and tested under a pressure of 30 bars.

**CASING:** White powder coated aluminium, high corrosion strength, impact resistance, and does not produce polluting debris.


**FAN MOTORS:** All with high quality axial fan motors with high safety standards fitted well to the unit casing with an anti-vibration system.

**DEFROST HEATERS:** Provided by stainless steel heater elements covered by the aluminium tubes, located in the finned pack and in the drain pan.

**ELECTRICAL PARTS & WIRING:** Are connected to an earth terminal, carried out in junction box with access holes equipped with water-proof cable glands. All materials are selected carefully for long-term reliability.

## ADVANTAGES OF MICROCOOL EVAPORATORS



- ❖ Low noise level
- ❖ High performance fans
- ❖ Low energy consumption
- ❖ Better cost / Benefit relation
- ❖ High efficient heat exchanger
- ❖ Easy installation and maintenance
- ❖ Fin spacing in 4, 4.5, 6, 7, 9 and 10 mm.
- ❖ Anti-corrosion fins\*
- ❖ Stainless steel casing\*
- ❖ Hot gas defrost version\*
- ❖ Defrost safety thermostat\*
- ❖ Solenoid valve and expansion valve inside\*

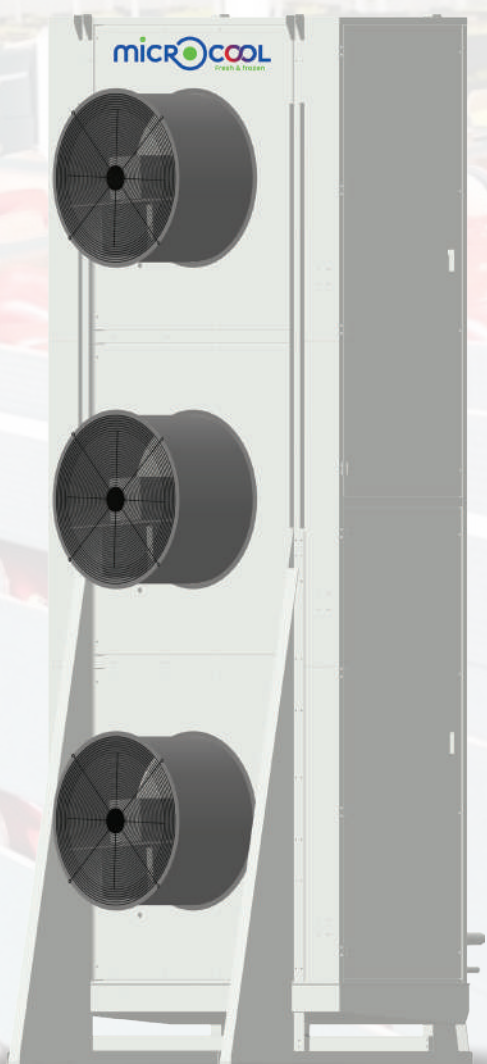


MEP - PREMIUM SERIES EVAPORATORS

# Fin Spacing - 4mm/ 6mm/ 7mm/ 9mm with Electric Defrost


MODEL	Capacity (KW)		CONNECTION (ø mm)		DIMENSIONS (mm)						
	Te=-8°C	Te=-25°C	INLET	OUTLET	A	B	C	D	E	F	G
	DT1 = 8K	DT1 = 7K									
MEP 2501 4D	1.84	1.34	12	16	702	420			430	350	200
MEP 2502 4D	3.55	2.59	12	19	1094	812			430	350	200
MEP 2503 4D	5.21	3.80	12	22	1486	1204			430	350	200
MEP 2504 4D	6.95	5.07	12	22	1878	1596			430	350	200
MEP 2506 4D	10.61	7.78	15	28	2662	2380	798	784	430	350	250
MEP 3001 4D	2.41	1.76	12	19	702	420			415	460	200
MEP 3002 4D	4.89	3.57	12	22	1094	812			415	460	200
MEP 3003 4D	7.40	5.40	12	22	1486	1204			415	460	250
MEP 3004 4D	9.74	7.10	15	28	1878	1596			415	460	250
MEP 3006 4D	14.69	10.69	15	28	2662	2380	798	784	415	460	300
MEP 4001 4D	4.63	3.33	12	19	912	630			455	530	250
MEP 4002 4D	8.96	6.45	12	22	1486	1204	602		455	530	300
MEP 4003 4D	11.31	8.14	15	28	1878	1596	551	494	455	530	300
MEP 4004 4D	18.71	13.48	15	35	2662	2380	597	593	455	530	350
MEP 4501 4D	6.74	4.92	12	22	1094	812			460	600	300
MEP 4502 4D	13.49	9.83	15	28	1878	1596	798		460	600	300
MEP 4503 4D	18.98	13.89	15	35	2662	2380	798	784	460	600	350
MEP 5001 4D	12.22	8.15	15	28	1165	850			455	740	400
MEP 5001 4D	15.44	10.58	15	28	1165	850			455	740	400
MEP 5002 4D	23.06	13.88	22	35	2015	1700		850	455	740	400
MEP 5002 4D	28.59	16.97	22	35	2015	1700		850	455	740	400
MEP 5003 4D	35.72	23.51	28	42	2865	2550		850	455	740	450
MEP 5003 4D	44.36	27.18	28	42	2865	2550		850	455	740	450




MCPA  
2501/3001/4001/4501




MCPA  
2502/3002/4002/4502

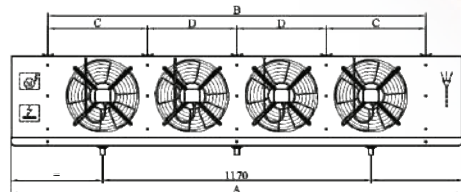

MCPA  
2504/3004  
4004

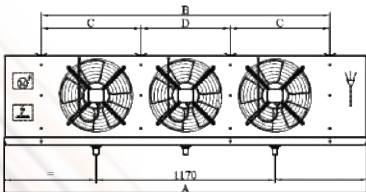





MCPA  
2503/3003/4003  
4503

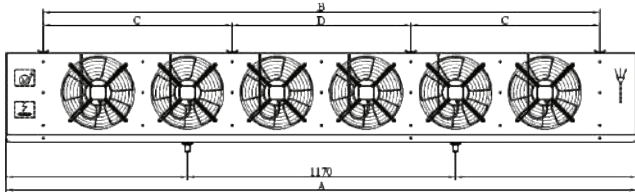

MCPA  
2506/3006

# Electric Data


MODEL	AXIAL FAN					ELECTRIC DEFROST			
	FAN Ø X NO	VOLTAGE (V/50Hz)	POWER (W)	CURRENT (A)	AIR FLOW (m3/h)	AIR THROW (m)	COIL (W)	DRAIN PAN (W)	TOTAL
MEP 2501 4D	250 x 1	230V/1PH	44	0.20	1100	4	2 x 440	1 x 440	1320
MEP 2502 4D	250 x 2	230V/1PH	88	0.40	2200	7	2 x 730	1 x 730	2190
MEP 2503 4D	250 x 3	230V/1PH	132	0.60	3300	8	2 x 1030	1 x 1030	3090
MEP 2504 4D	250 x 4	230V/1PH	176	0.80	4400	9	2 x 1310	1 x 1310	3930
MEP 2506 4D	250 x 6	230V/1PH	264	1.20	6600	12	2 x 1890	1 x 1890	5670
MEP 3001 4D	300 x 1	230V/1PH	80	0.40	1700	5	3 x 440	1 x 440	1760
MEP 3002 4D	300 x 2	230V/1PH	160	0.80	3400	7	3 x 730	1 x 730	2920
MEP 3003 4D	300 x 3	230V/1PH	240	1.20	5100	10	3 x 1030	1 x 1030	4120
MEP 3004 4D	300 x 4	230V/1PH	320	1.60	6800	11	3x 1310	1 x 1310	5240
MEP 3006 4D	300 x 6	230V/1PH	480	2.40	10200	12	3 x 1890	1 x 1890	7560
MEP 4001 4D	400 X 1	230V/1PH	177	0.87	3500	9	4 x 550	1 x 550	2750
MEP 4002 4D	400 X 2	230V/1PH	354	1.74	7000	12	4 x 1030	1 x 1030	5150
MEP 4003 4D	400 X 3	230V/1PH	531	2.61	10500	13	4 x 1310	1 x 1310	6550
MEP 4004 4D	400 X 4	230V/1PH	708	3.48	14000	15	4 x 1890	1 x 1890	9450
MEP 4501 4D	450 X 1	230V/1PH	235	1.10	5000	13	4 x 730	1 x 730	3650
MEP 4502 4D	450 X 2	380V/3PH	466	1.28	10000	15	4 x 1310	1 x 1310	6550
MEP 4503 4D	450 X 3	380V/3PH	699	1.92	15000	17	4 x 1890	1 x 1890	9450
MEP 5001 4D	500 X 1	380V/3PH	650	1.15	8150	26	6 x 730	1 x 730	5110
MEP 5001 4D	500 X 1	380V/3PH	650	1.15	8150	25	7 x 730	2 x 730	6570
MEP 5002 4D	500 X 2	380V/3PH	1300	2.30	16500	28	6 x 1400	1 x 1400	9800
MEP 5002 4D	500 X 2	380V/3PH	1300	2.30	16500	27	7 x 1400	2 x 1400	12600
MEP 5003 4D	500 X 3	380V/3PH	1950	3.45	24750	30	6 x 2050	1 x 2050	14350
MEP 5003 4D	500 X 3	380V/3PH	1950	3.45	24750	29	7 x 2050	2 x 2050	18450

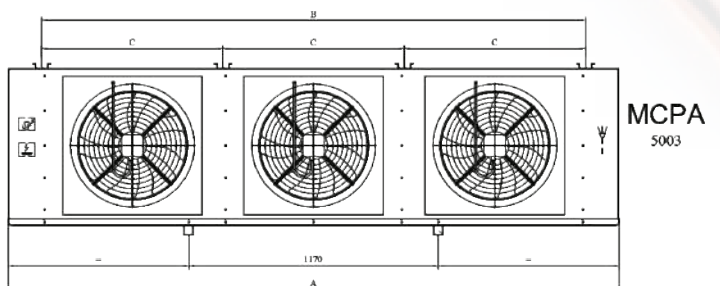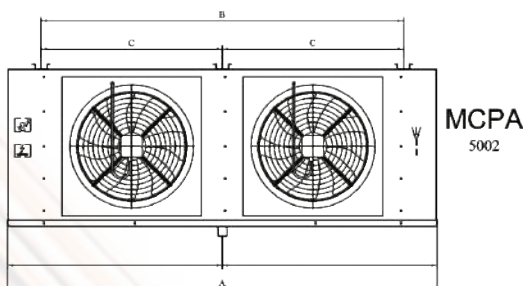



MEB - INDUSTRIAL SERIES EVAPORATORS

# Fin Spacing - 4mm/ 6mm/ 7mm/ 9mm **Electric Defrost**


MODEL	Capacity R404A/R507A (kw)		CONNECTION (ø mm)		DIMENSIONS (mm)							
	Te=-8°C	Te=-25°C	INLET mm	OUTLET mm	A	B	C	D	E	F	G	H
	DT1 = 8K	DT1 = 7K										
MEB 5501 4 5D	13.12	9.94	15	35	1475	1030	1030	900	610	800	300	720
MEB 5502 4 5D	26.25	19.88	22	42	2505	2060	1030	900	610	800	400	720
MEB 5503 4 5D	39.37	29.82	22	54	3535	3090	1030	900	610	800	450	720
MEB 5504 4 5D	50.87	38.52	22	67	4665	4120	1030	900	610	800	490	720
MEB 6301 4 5D	20.07	15.30	15	42	1675	1230	1230	1000	700	940	310	822
MEB 6302 4 5D	40.12	30.58	22	54	2905	2460	1230	1000	700	940	440	822
MEB 6303 4 5D	60.19	45.88	2x22	2x54	4165	3690	1230	1000	700	940	530	822
MEB 6304 4 5D	80.25	61.17	2x22	2x54	5365	4920	1230	1300	700	940	580	822
MEB 8001 4 5D	28.94	21.99	22	54	1875	1430	1430	1300	770	1045	390	880
MEB 8002 4 5D	57.90	43.99	28	76	3305	2860	1430	1300	770	1045	580	880
MEB 8003 4 5D	86.85	65.99	2x22	2x54	4735	4290	1430	1300	770	1045	700	880

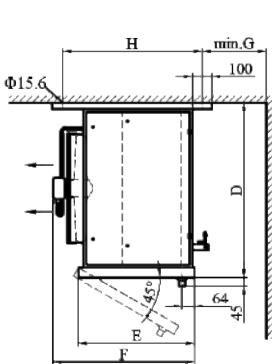


MEB 5501/6301/8001

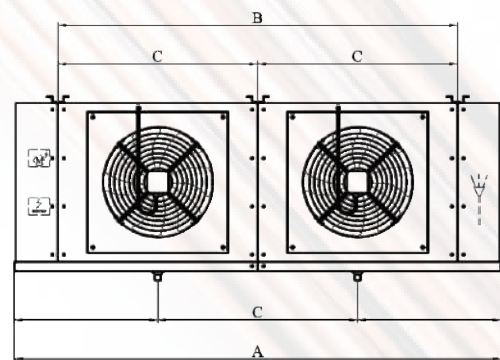

MEB 5501/6302/8002

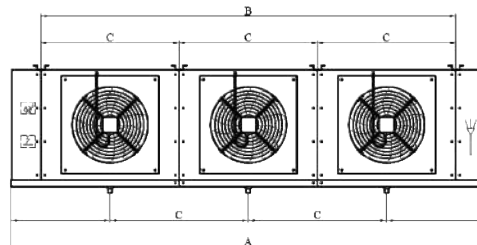

MEB 5503/6303/8003

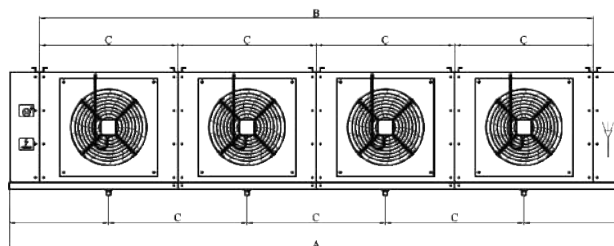


MEB 5504/6304

# Electrical Data

MODEL	AXIAL FANS						ELECTRIC DEFROST		
	FAN Ø X N°	VOLTAGE (V/50Hz)	POWER (W)	CURRENT (A)	AIR FLOW m3/hr	AIR THROW (m)	COIL (W)	DRAIN PAN (W)	TOTAL (W)
MEB 5501 4.5D	550 x 1	380V/3PH	720	1.55	9800	26	4 x 1280	2x 1280	7680
MEB 5502 4.5D	550 x 2	380V/3PH	1440	3.1	19600	28	4 x 2320	2 x 2320	13920
MEB 5503 4.5D	550 X3	380V/3PH	2160	4.65	29400	30	4 x 3200	2 x 3200	19200
MEB 5504 4.5D	550 X4	380V/3PH	2880	6.2	39200	32	4 x 4260	2 x 4260	25560
MEB 6301 4.5D	630 x 1	380V/3PH	735	1.32	11500	27	7 x 1510	2 x 1510	13590
MEB 6302 4.5D	630 x 2	380V/3PH	1470	2.64	23000	30	7 x 2740	2 x 2740	24660
MEB 6303 4.5D	630 x 3	380V/3PH	2205	3.96	34500	32	7 3800	2 x 3800	34200
MEB 6304 4.5D	630 x 4	380V/3PH	2940	5.28	46000	34	7 x 5060	2 x 5060	45540
MEB 8001 4.5D	800 x 1	380V/3PH	1380	2.49	18600	35	10x 1700	2 x 1700	20400
MEB 8002 4.5D	800 x 2	380V/3PH	2760	4.98	37200	39	10x2810	2 x 2810	33720
MEB 8003 4.5D	800 x 3	380V/3PH	4140	7.47	55800	40	10 4420	2 x 4420	53040


# Electrical Data

MODEL	AXIAL FANS						ELECTRIC DEFROST		
	FAN Ø X N°	VOLTAGE (V/50Hz)	POWER (W)	CURRENT (A)	AIR FLOW m3/hr	AIR THROW (m)	COIL (W)	DRAIN PAN (W)	TOTAL (W)
MEB 5501 7D	550 x 1	380V/3PH	720	1.55	9800	26	4 x 1280	2x 1280	7680
MEB 5502 7D	550 x 2	380V/3PH	1440	3.1	19600	28	4 x 2320	2 x 2320	13920
MEB 5503 7D	550 X3	380V/3PH	2160	4.65	29400	30	4 x 3200	2 x 3200	19200
MEB 5504 7D	550 X4	380V/3PH	2880	6.2	39200	32	4 x 4260	2 x 4260	25560
MEB 6301 7D	630 x 1	380V/3PH	735	1.32	11500	27	7 x 1510	2 x 1510	13590
MEB 6302 7D	630 x 2	380V/3PH	1470	2.64	23000	30	7 x 2740	2 x 2740	24660
MEB 6303 7D	630 x 3	380V/3PH	2205	3.96	34500	32	7 3800	2 x 3800	34200
MEB 6304 7D	630 x 4	380V/3PH	2940	5.28	46000	34	7 x 5060	2 x 5060	45540
MEB 8001 7D	800 x 1	380V/3PH	1380	2.49	18600	35	10x 1700	2 x 1700	20400
MEB 8002 7D	800 x 2	380V/3PH	2760	4.98	37200	39	10x2810	2 x 2810	33720
MEB 8003 7D	800 x 3	380V/3PH	4140	7.47	55800	40	10 4420	2 x 4420	53040

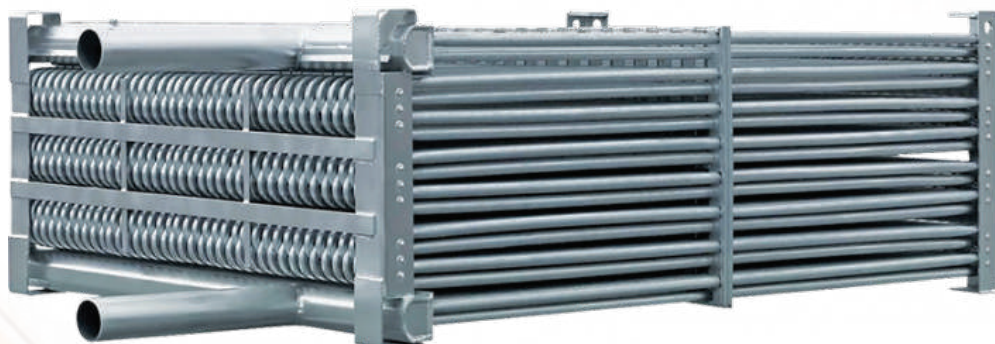


**Ammonia coil**

# Ammonia & Blast Freezer

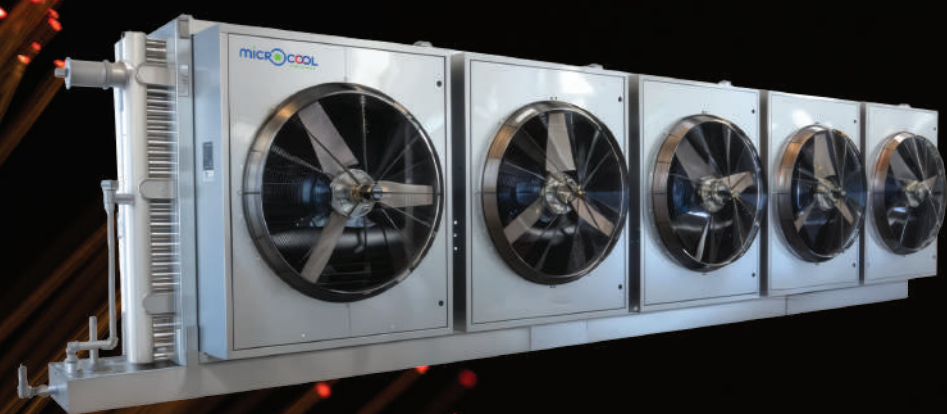

- ❖ High-grade aluminum fins (corrugated/rippled) maximize heat transfer.
- ❖ Orbital SS tube welding ensures leak-proof seals.
- ❖ Square fin pitch/pyramid fins optimize airflow.
- ❖ 100% pressure tested coils prevent leaks.
- ❖ Custom ammonia units for diverse needs.

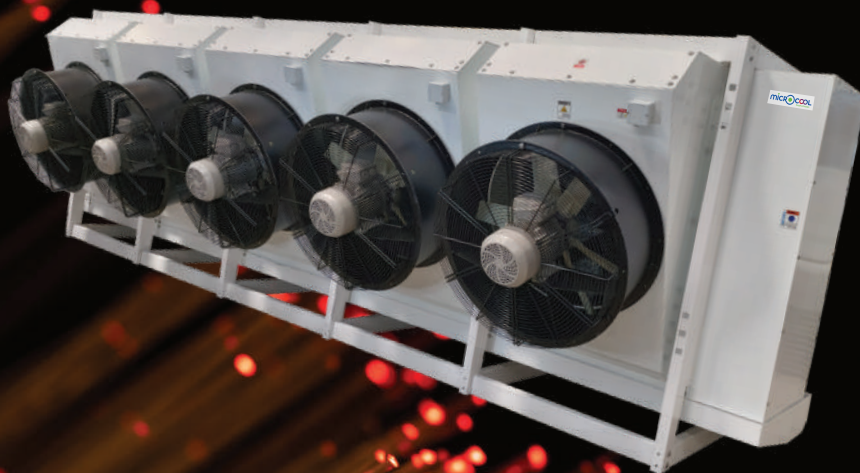



- ❖ Temp Ranging from  $-5^{\circ}\text{C}$  (Blast chiller) to  $-45^{\circ}\text{C}$  (Blast Freezer).
- ❖ Tube Axial Fan for high Air throw.
- ❖ Double drip tray with designed angle.
- ❖ Rippled fin edges for turbulence air flow.
- ❖ Ceiling & Floor mounting Design for easy installation.
- ❖ Large Coils heat exchanger with Grooved Tube  $1/2$  &  $5/8$ " for large surface area with Pyramid structure.
- ❖ Single stage or two stage semi hermetic compressor.
- ❖ Base frame on anti-vibration mounts.
- ❖ CNC machined copper piping.

MEF - FREEZER SERIES EVAPORATORS (Ceiling and Floor mounted)

# Fin Spacing - 7mm /10 mm /12 mm

## - Electric Deforst

MODEL	Capacity R404A/R507A (kw)		CONNECTION (ø mm)		NUMBER OF ROWS	DIMENSIONS (mm)				
	Te=-8°C	Te=-25°C	INLET (mm)	OUTLET (mm)		A (L)	B (H)	C (W)	H1	H2
	DT1 = 8K	DT1 = 7K								
MEF 6302 7D	27.44	22.9	28	54	6	1665	1090	230	1965	2140
MEF 6302 7D	32.01	26.1	28	67	8	1665	1090	230	1965	2140
MEF 6304 7D	56.29	47.03	2x28	2x54	6	2865	1090	230	1965	2140
MEF 6304 7D	65.82	53.78	2x28	2x54	8	2865	1090	230	1965	2140
MEF 6306 7D	85.14	71.17	2X35	2x76	6	4215	1090	230	1965	2140
MEF 6306 7D	105.11	88.39	2X35	2x76	8	4215	1090	230	1965	2140
MEF 8002 7D	37.28	31.32	35	76	6	2130	1200	295	2310	2605
MEF 8002 7D	45.32	38.53	35	76	8	2130	1200	295	2310	2605
MEF 8004 7D	73.8	61.05	2X35	2x76	6	3670	1200	295	2310	2605
MEF 8004 7D	92.18	77.25	2X35	2x76	8	3770	1200	295	2310	2605
MEF 8006 7D	111.43	92.21	2X35	2x76	6	5310	1200	295	2310	2605
MEF 8006 7D	135.89	113.35	2X35	2x76	8	5310	1200	295	2310	2605
MEF 6302 10D	23.46	19.72	28	54	6	1665	1090	230	1965	2140
MEF 6302 10D	28.45	23.43	28	67	8	1665	1090	230	1965	2140
MEF 6304 10D	48.07	40.45	2 x 28	2x54	6	2865	1090	230	1965	2140
MEF 6304 10D	58.42	48.19	2 x 28	2x54	8	2865	1090	230	1965	2140
MEF 6306 10D	72.7	61.2	2X35	2x76	6	4215	1090	230	1965	2140
MEF 6306 10D	91.16	77.3	2X35	2x76	8	4215	1090	230	1965	2140
MEF 8002 10D	31.89	26.83	35	76	6	2130	1200	295	2310	2605
MEF 8002 10D	39.46	32.98	35	76	8	2130	1200	295	2310	2605
MEF 8004 10D	63.96	53.41	2X35	2x76	6	3670	1200	295	2310	2605
MEF 8004 10D	77.03	64.45	2X35	2x76	8	3770	1200	295	2310	2605
MEF 8006 10D	96.53	80.65	2X35	2x76	6	5310	1200	295	2310	2605
MEF 8006 10D	119.62	100.45	2X35	2x76	8	5310	1200	295	2310	2605

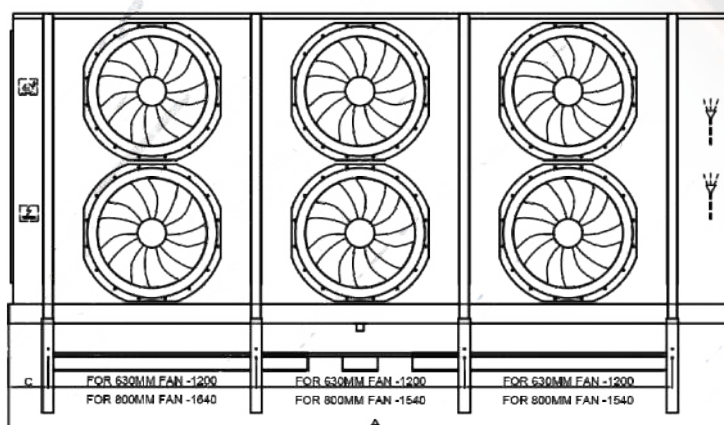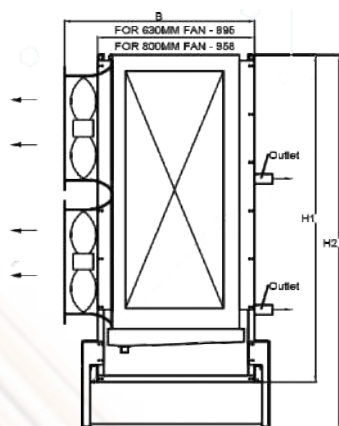

MEF 6306/8006

# Refrigeration Condensing Unit



<b>Capacity</b>	1 HP - 40 HP
<b>Compressor type</b>	Harmetic Recip. Scroll Semi harmetic Screw
<b>Refrigerant</b>	R134a, R22, R407c, R404a, R410, R32, R717
<b>Power supply</b>	1Ø - 230v 50 Hz 3Ø - 400v 50/60 Hz




## Commercial Refrigeration MBP (R134a)

CU Model	Compressor Used	Capacity (W)	Power Input (W)	Weight (Kg)
MCFR 419 PGIS	KCE419	444	240	15
MCFR 421 PGIS	ECZ421	646	225	15
MCFR 432 PGIS	KCE432	990	345	20
MCFR 444 PGIS	KCE444	1075	470	20
MCFR 463 PGIS	KCN463	1458	625	25
MCFR 467 PGIS	KCJ467	1569	700	30
MCFR 498 PGIS	KCJ498	2199	988	35

Cooling Capacity at 7.2C and 35C, Return Gas Temp 18.3C and 0 K

# Our Products

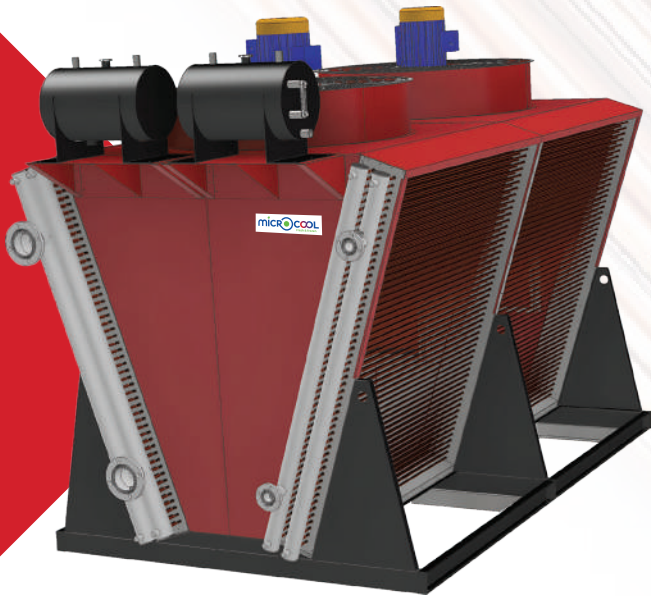

## Dry Coolers

- ❖ Our dry air coolers are designed to offer equipment with reduced maintenance and long service life.
- ❖ Each dry air cooler series presents different types of work, impulsion, suction, horizontal coils, or V shape.
- ❖ All of them are equipped with finned heat exchange coils and casing constructed from profiles and sheets of 2-3 mm thick galvanized steel for robustness.

# Our **Products**



## Heat Pumps

- ❖ Costs 70% less to operate than a gas heater.
- ❖ Starts heating at lower temperatures when the competition doesn't.
- ❖ Models available for pool and spa systems.
- ❖ Earth friendly — no harmful emissions.

## Flame Proof Air Conditioner & Refrigeration Unit

- ❖ Capacity Range 1.5 TR – 11 TR.
- ❖ Room Temperature +5 °C – 26 °C.
- ❖ Cabinet Construction SS304/306.
- ❖ High Pressure Low Pressure Safety Switches.
- ❖ Overload OLTR (amps) Safety Switches.
- ❖ Liquid Injector To Maintain T6 Temp Class



# Telecom/Data Center cooling unit

(a) AC Aircon (b) DC Aircon (c) Hex Aircon



Special cooling needs for telecom and battery cooling as per need of application. We design keeping high ambient & dusty conditions of India.

**Capacity range from 600 - 10,000 Watts with eco friendly refrigerant**

**Voltage option DC48V, A/C 230V / 400V.**

Parameter	Details
Cooling Capacity	600 - 10,000 W
Heat Load Capacity	2000-2500 W
Sensible Heat Ratio	90-95%



# Locations



**Khushkhera  
(Rajasthan)**



**New Delhi  
Corporate Office**



**Salarpur (Rajasthan)**



**Bawal (Haryana)**




**Vemgal (Karnataka)**



# Export



**Holand**



**Germany**



**Italy**



**USA**



**Australia**



**Gulf Countries**

## MICRO COILS AND REFRIGERATION PVT. LTD.

E-41 (E1) RIICO Industrial Area, Khushkhera - Distt: Khairthal-Tijara, Rajasthan - 301707

T: +91 (149) 3298118 M: +91-95878 96101 Toll Free No.: 1800 121 9499

E-mail: sales@microcoils.in | Web: www.microcoils.in

